



2021

PORCELAIN

GENERAL CATALOGUE



NOVIN CERAM




Novin Ceram Tile Company was established in 2003 and in 2009 its management team changed. From that time they started purchasing tools and machinery as well as significant construction activities. The company has been fully operational since 2011 with the help of Iranian and foreign experts.

The factory is located in Sefid Kooh industrial zone of Taft with 37000 square meters building area in a 27 hectares land.

Using advanced machineries help the company to manufacture different kinds of floor and wall tiles from 20X20 to 70X140 cm. All the products are finely produced using the best quality of local and global materials. Local materials have the most shares in production.

From the very beginning stage of company establishment, the management, planned management system based on novel management solutions in order to gain effectiveness in all activities. Therefore the company considers itself conscientious of all Islamic Republic of Iran laws and regulations. Moreover the company does its best to get all required management system certificate to improve its results. Right now Novin Ceram Yazd Tile has over 300 personnel, modern machinery and an annual production capacity of 8 million square meters.

The major goal of the company is production improvement and customer satisfaction and it intends to create merits over competitors to gain more market share in local and global markets.



شرکت کاشی نوین سرام یزد در تابستان ۱۳۸۲ تأسیس و در پاییز ۱۳۸۸ با تغییر مدیریت ضمن فعالیت گسترده عمرانی نسبت به انتخاب و خرید ماشین آلات و تجهیزات تولید اقدام نمود. این شرکت در بهار ۱۳۹۰ توسط کارشناسان و متخصصان داخلی و با همکاری متخصصین خارجی مورد بهره برداری قرار گرفته است. کارخانه در منطقه صنعتی سفید کوه شهرستان تفت و در زمینی به مساحت ۲۷ هکتار با زیر بنای ۳۷۰۰۰ متر مربع احداث گردیده است. این شرکت با بهره گیری از مدرنترین ماشین آلات و تجهیزات روز دنیا قادر است انواع کاشی های کف و دیوار را در ابعاد ۲۰×۲۰ تا ۷۰×۱۴۰ تا ۲۰۰×۲۰۰ سانتیمتر تولید نماید. محصولات این شرکت با بهره گیری از مواد اولیه مرغوب داخلی و خارجی تولید می گردند که البته مواد داخلی سهم عمده آن را تشکیل می دهد.

مدیران شرکت از آغاز، طرح ریزی سیستم مدیریت را بر اساس الگوهای نوین مدیریتی پایه گذاری نموده اند تا اثربخشی کامل در کلیه فعالیت ها حاصل گردد. در این راستا مدیران شرکت خود را متعهد می دانند تا با رعایت کلیه قوانین و مقررات جمهوری اسلامی ایران و با اخذ گواهینامه سیستم مدیریت یکپارچه، سیستم سازمانی شرکت را متعالی سازند.

در حال حاضر شرکت کاشی نوین سرام یزد، با ظرفیت نامی هشت میلیون متر مربع در سال و با دارا بودن ۳۰۰ نفر پرسنل و ماشین آلات مدرن، هدف اساسی خود را تولید بهتر و جلب رضایت مشتریان قرار داده و قصد دارد با خلق مزیت های رقابتی، سهم خود را در بازارهای رقابتی و فشرده داخل و خارج از کشور، حفظ و بلکه افزایش دهد.





TILE COLLECTION

60*120 CM

SANILI (Blue)

Polished - 60*120cm



A



B

SANLI (Brown)

Polished - 60*120cm



NOVIN CERAM



A

B



AMANTUS(Blue)

Polished - 60*120cm



Light



Dark



AMANTUS

(Cream & Brown)

Polished - 60*120cm



NOVIN CERAM



Cream



Brown



Polished - 60*120cm




Random Tile

Face 10



Polished - 60*120cm

Book Mach

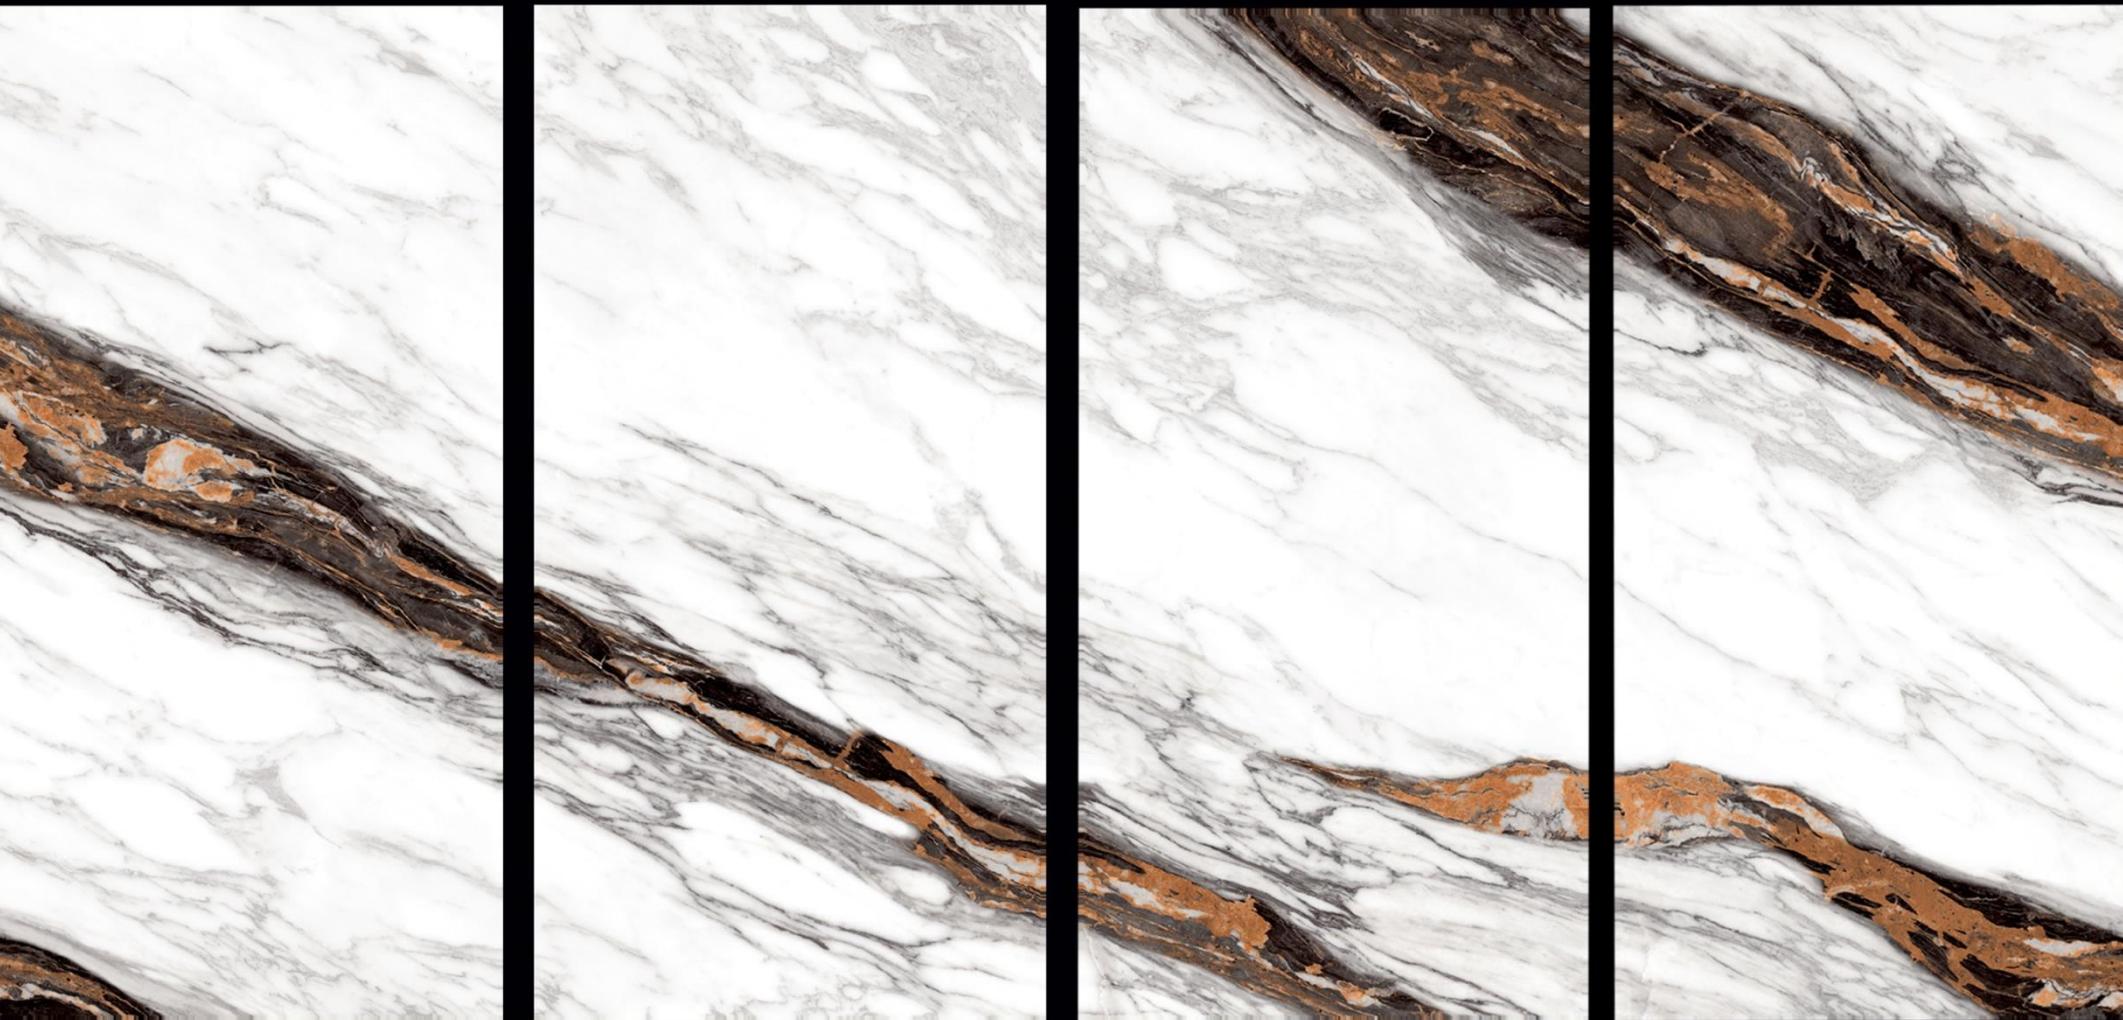

A

B


C

D



HIMALIA

Polished - 60*120cm

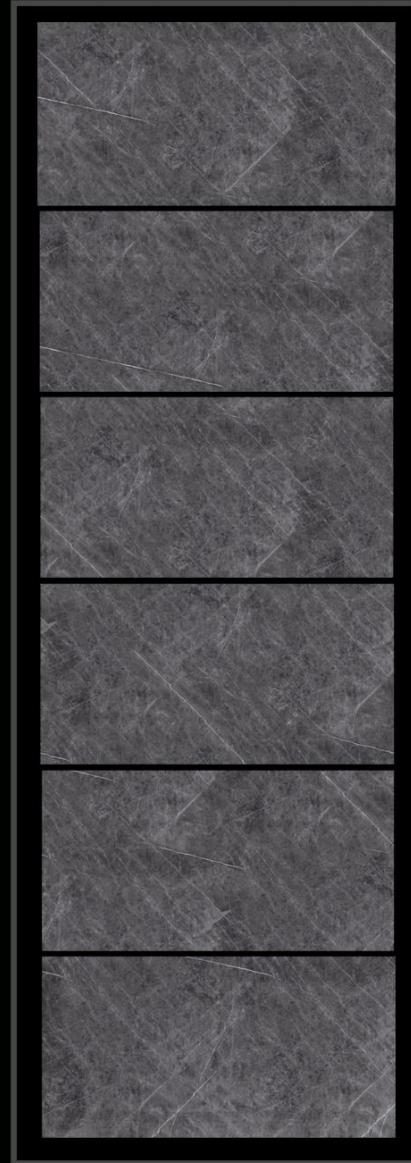

Polished - 60*120cm



SUNDIAL (GRAY)

Polished - 60*120cm

**SUNDIAL (BROWN)**

Polished - 60*120cm



**SUNDIAL (BLUE)**

Polished - 60*120cm

**NOVIN CERAM**


BRIGHTON

Polished - 60*120cm

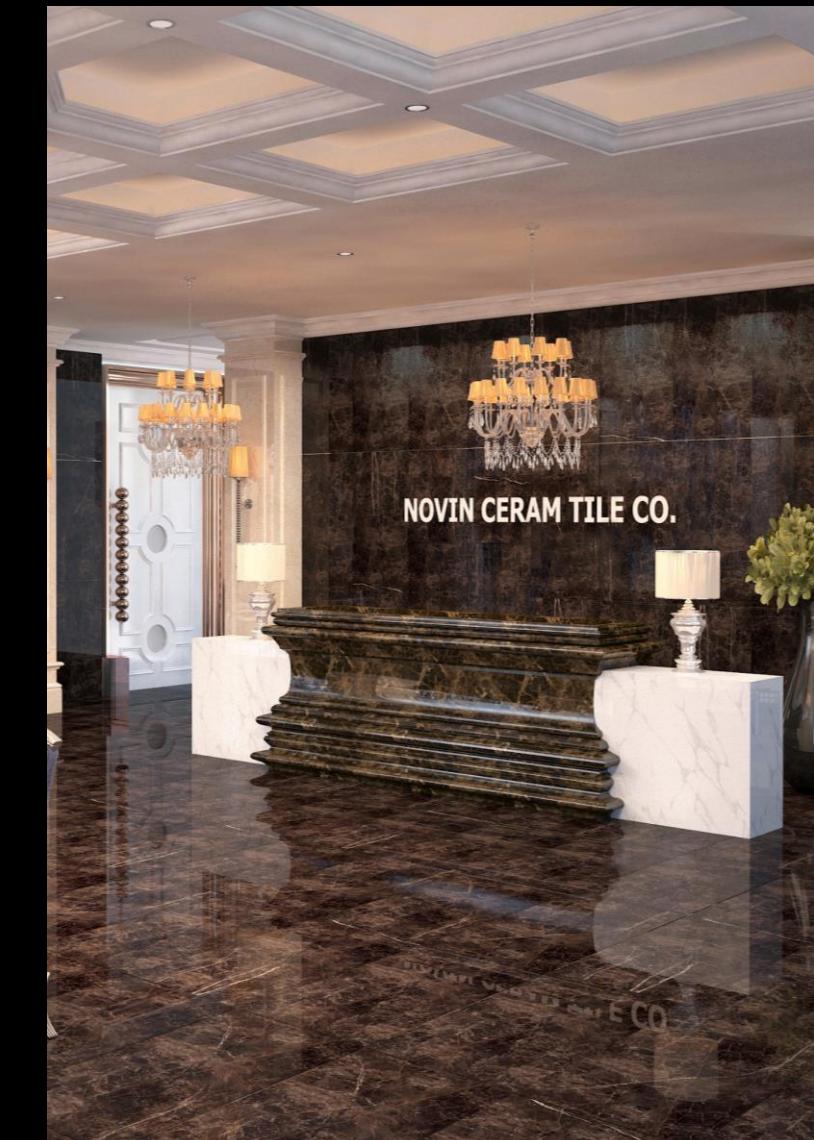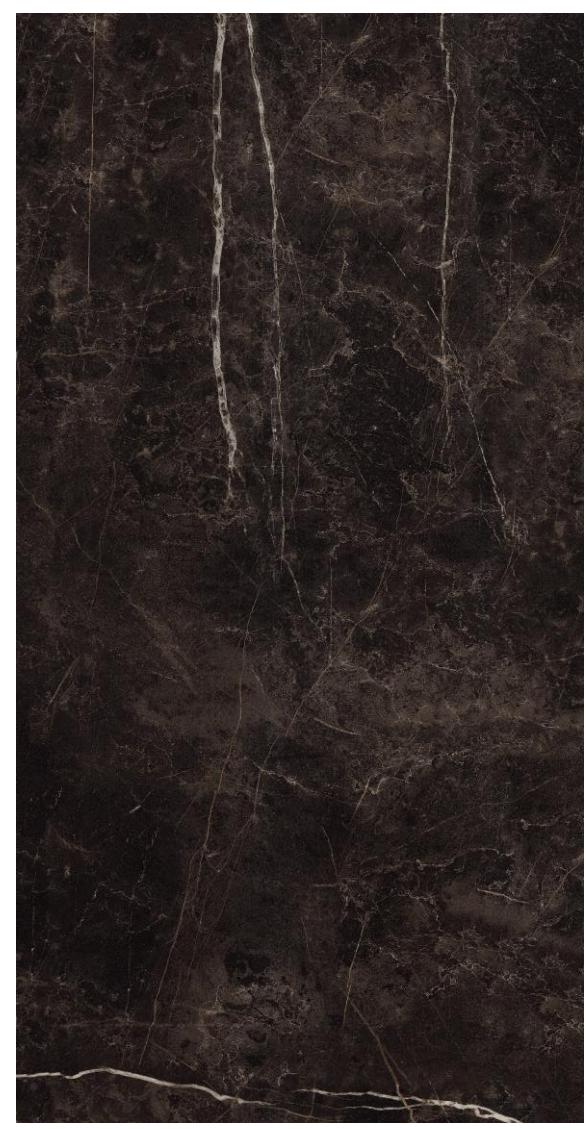



NEW ORLEANSE

Polished - 60*120cm

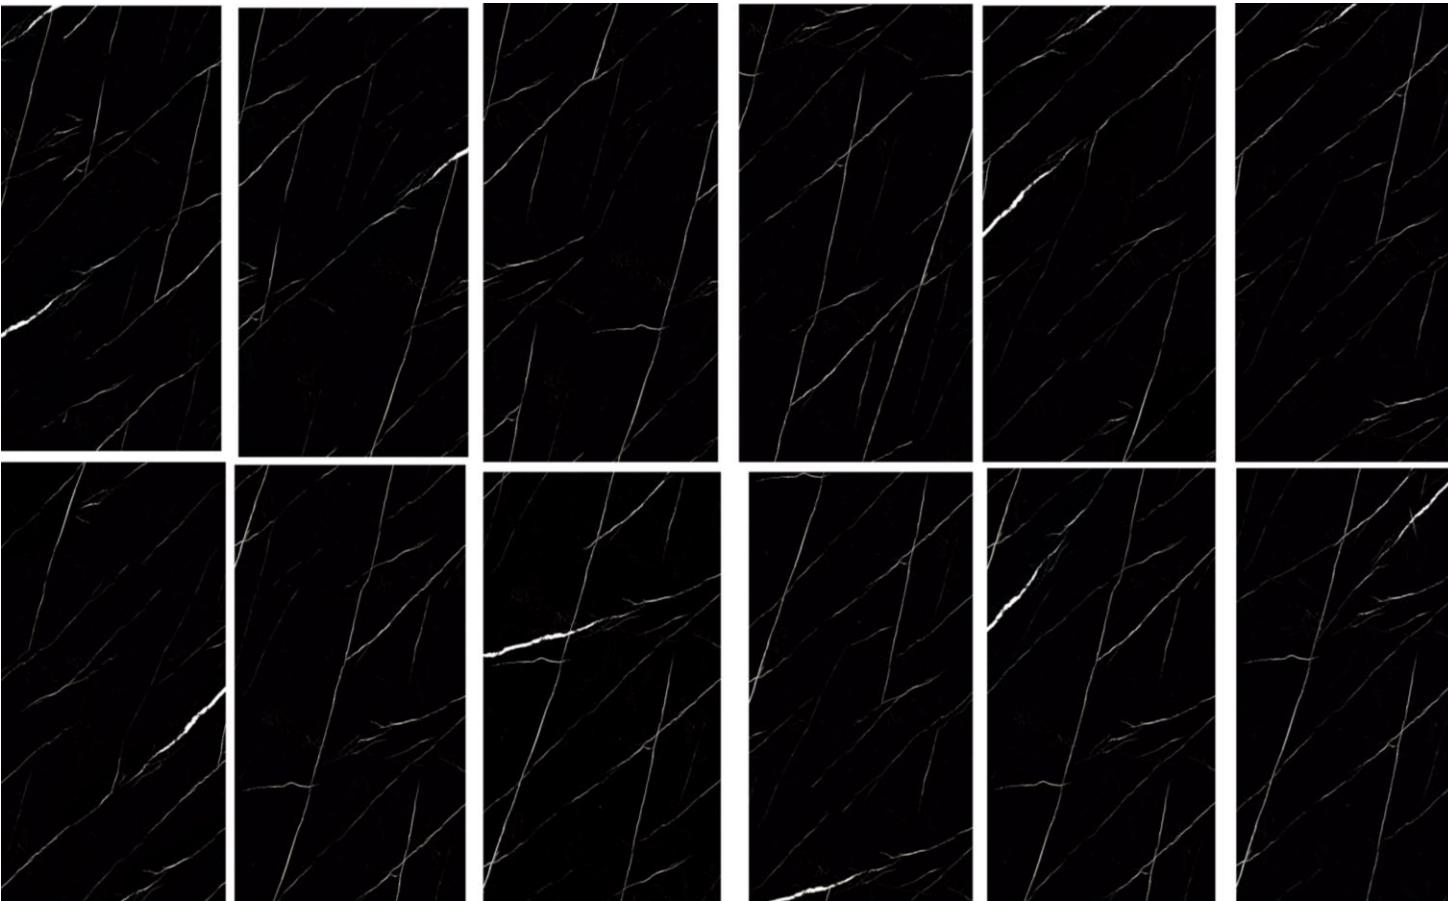

CITROEN


Polished - 60*120cm

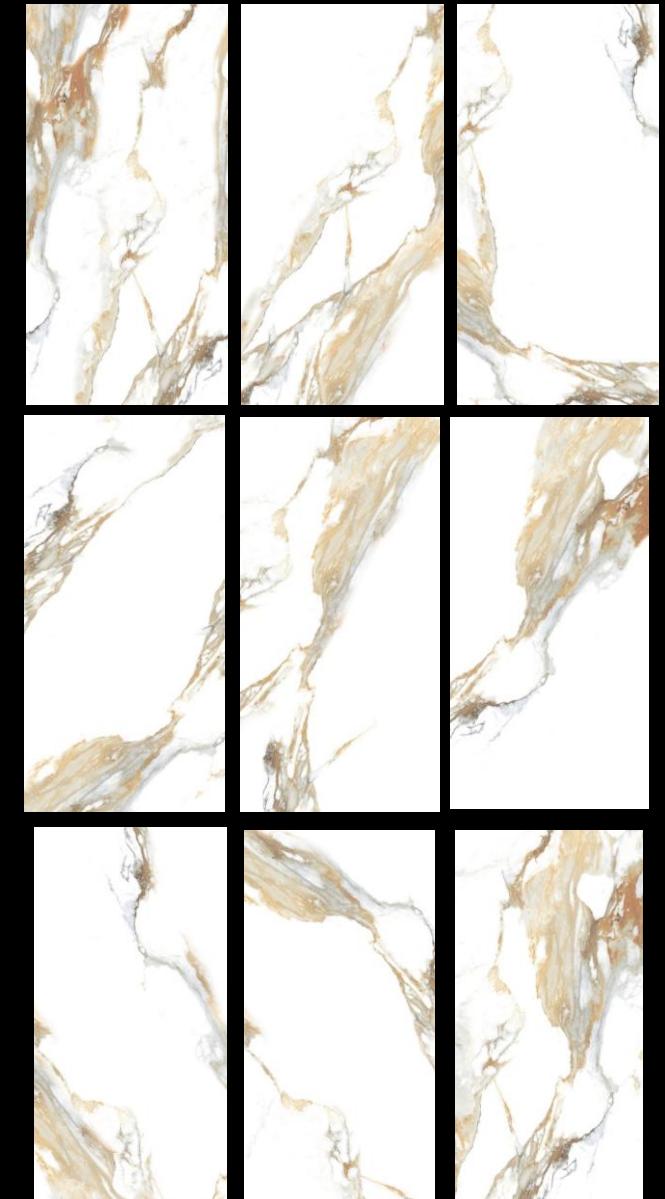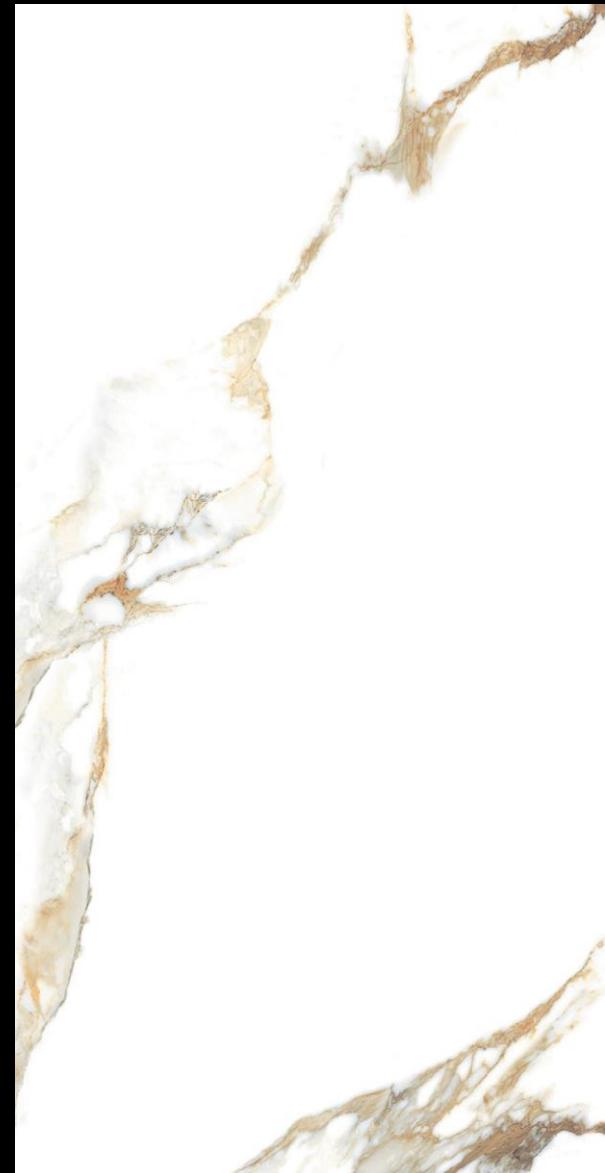

NOVIN CERAM


OPTIMA

Polished - 60*120cm

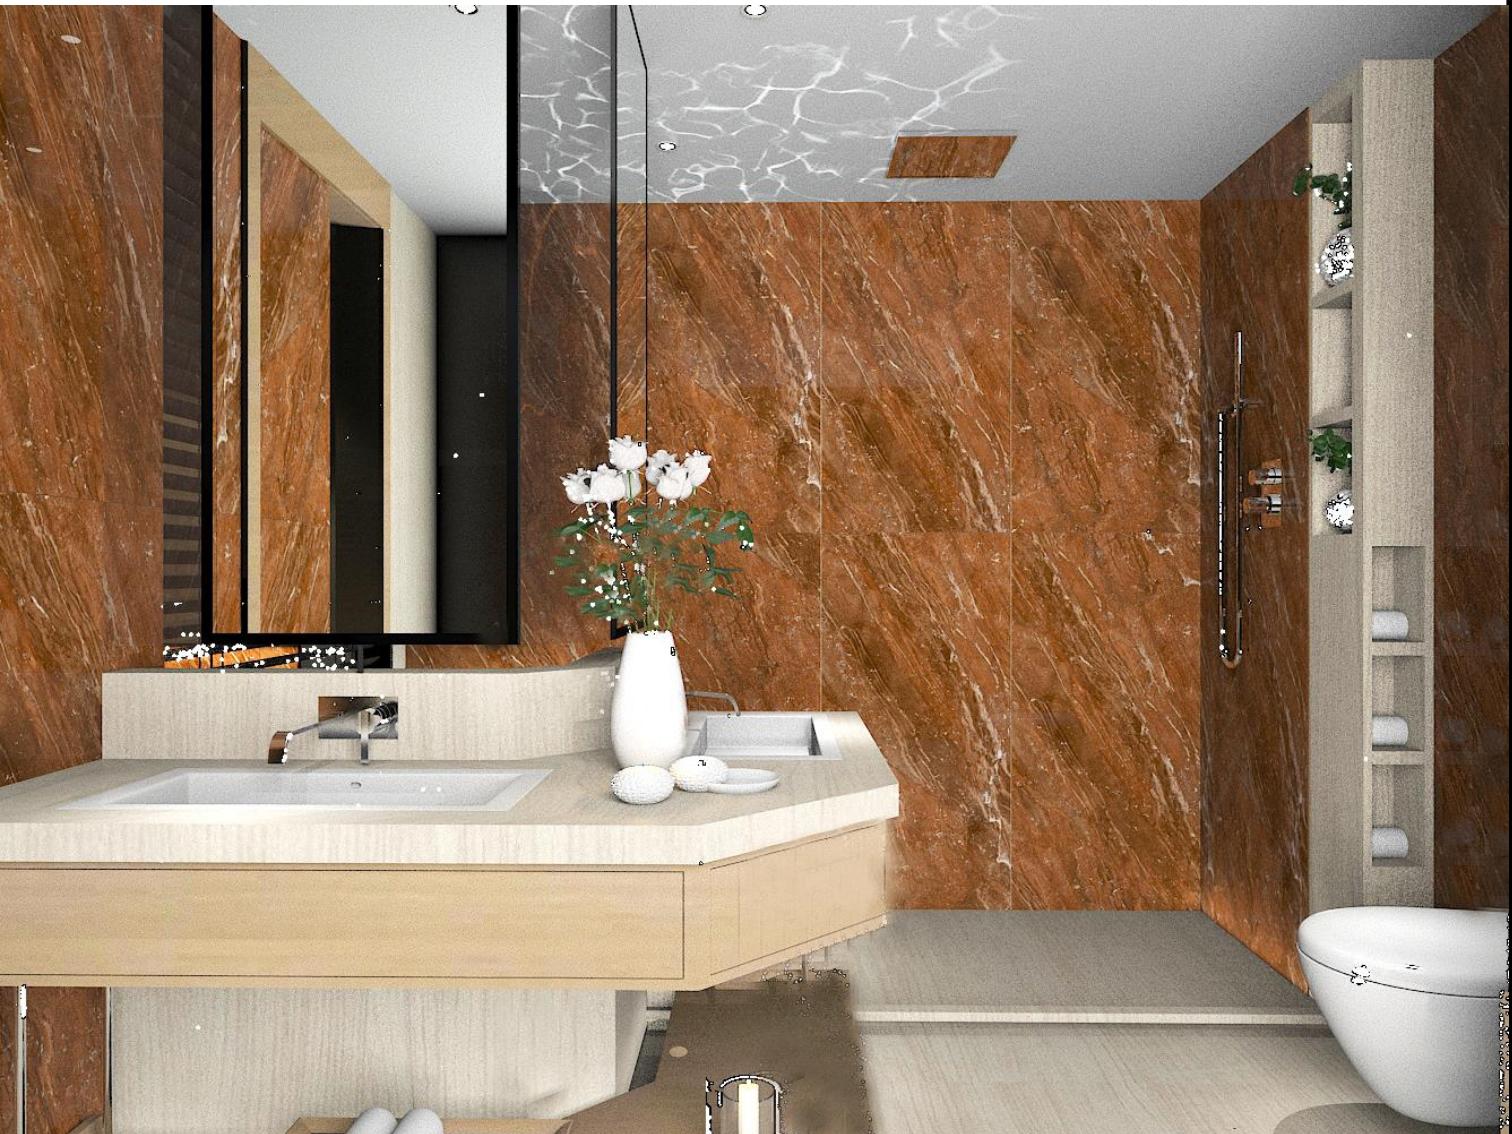

ATLANTA


Polished - 60*120cm

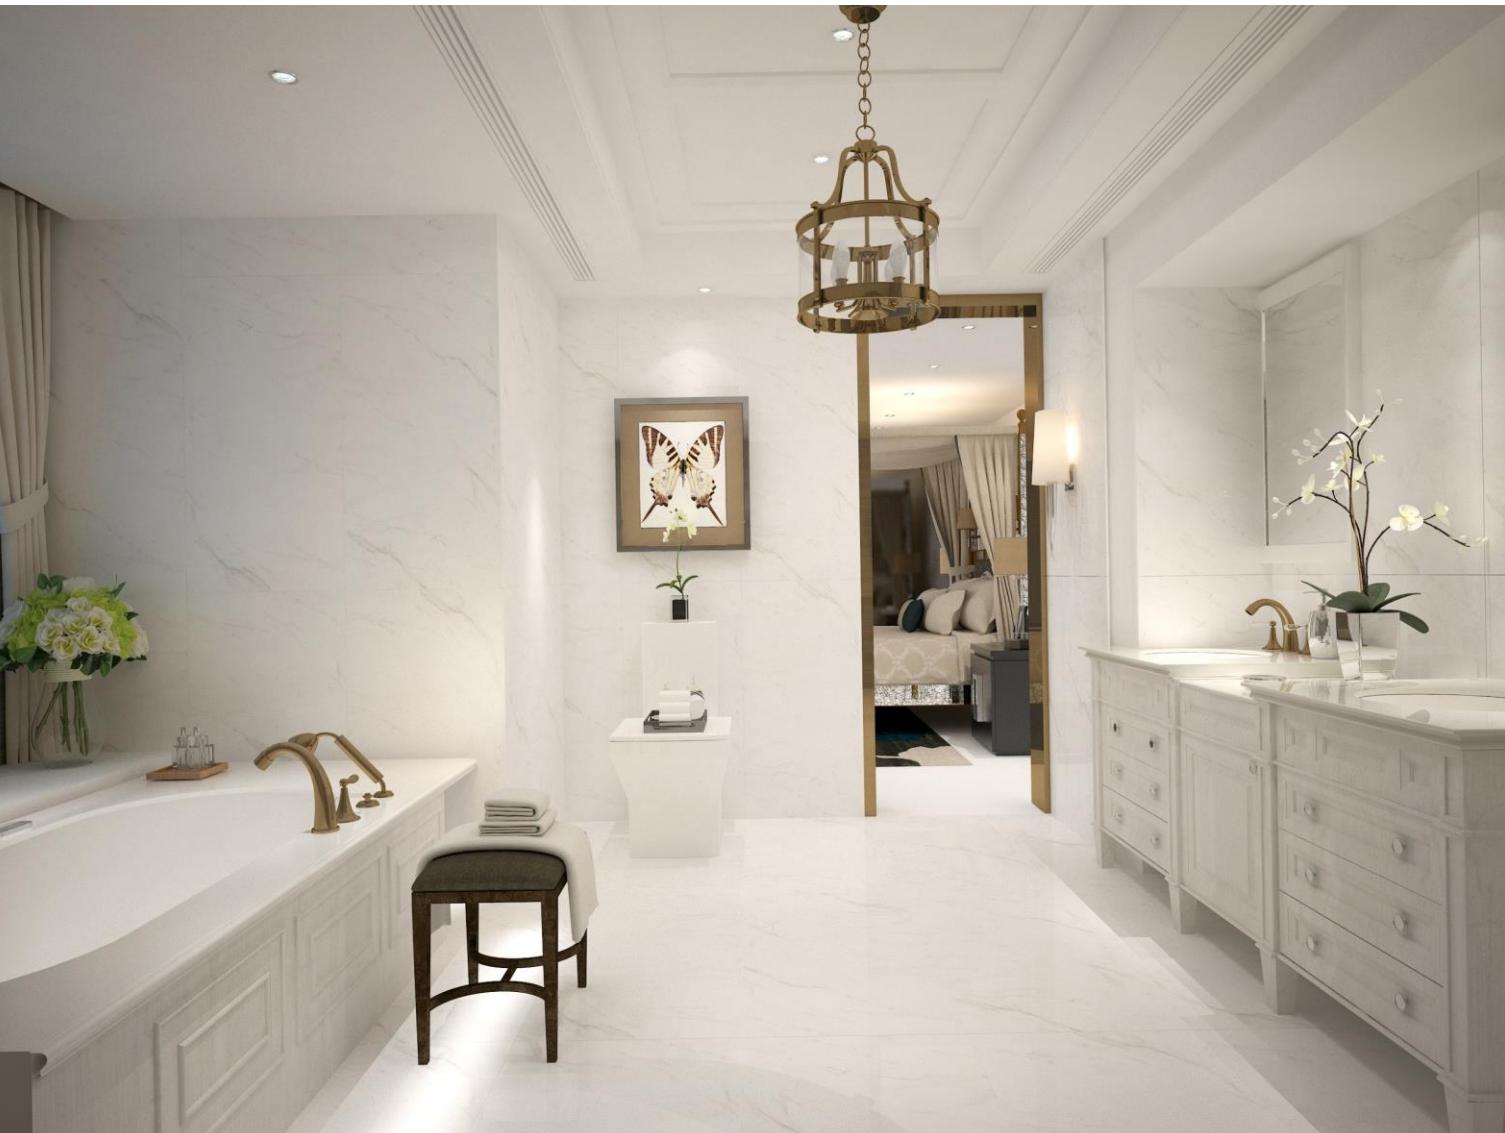

NOVIN CERAM



Polished - 60*120cm

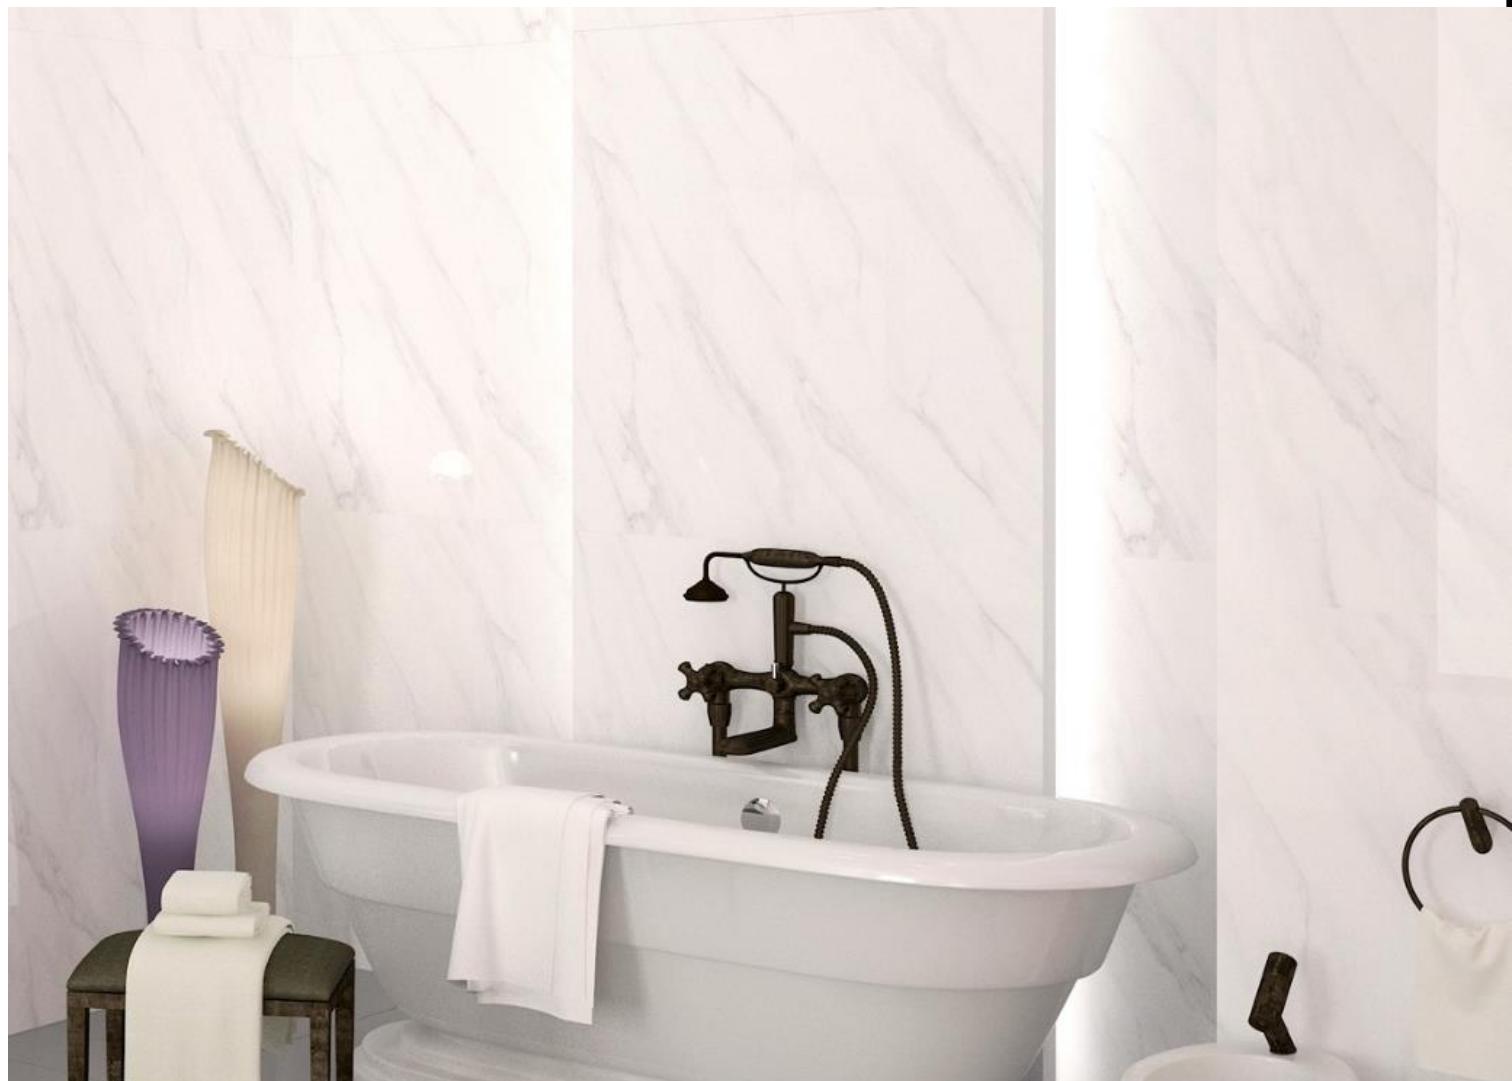

Random Tile
3 face

SETINA (White)

Polished - 60*120cm



SETINA (Black)

Polished - 60*120cm



YASHAKA

Polished - 60*120cm



LINDA

Polished - 60*120cm



Polished - 60*120cm



JORDANA

Polished - 60*120cm





NOVIN CERAM

SANTA

Polished - 60*120cm



Polished - 60*120cm

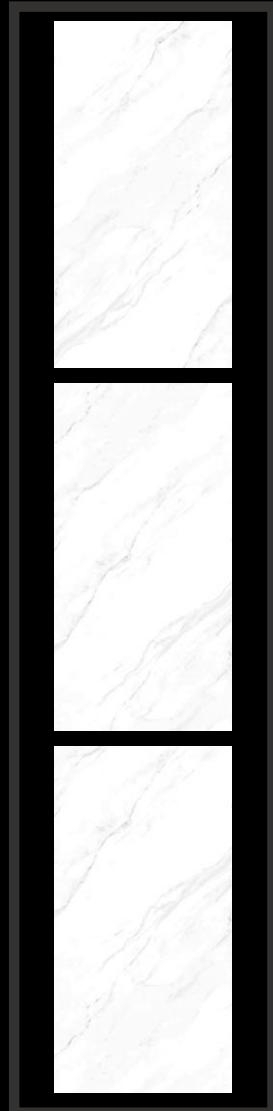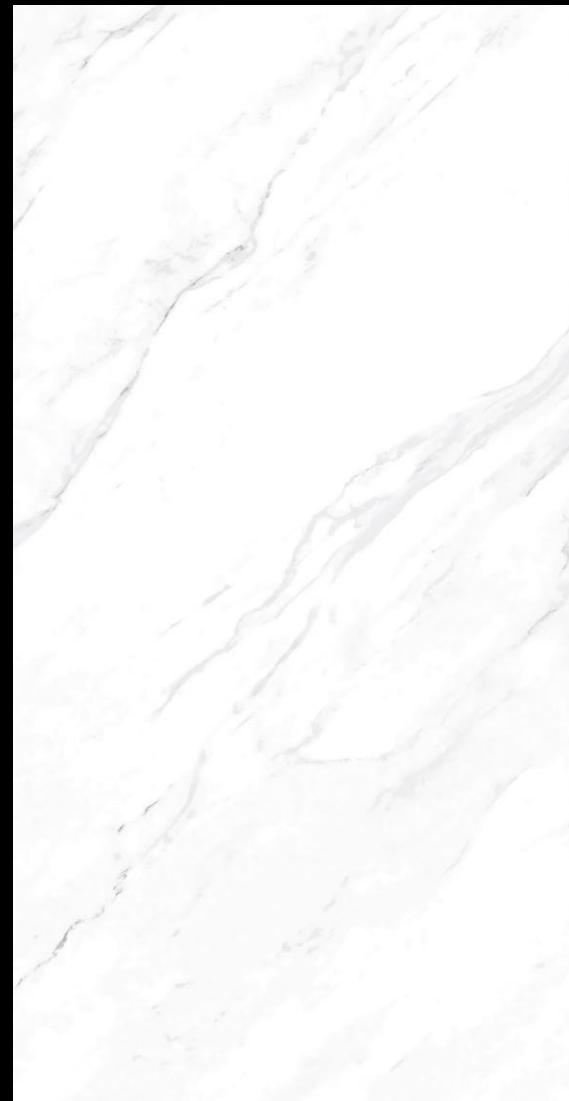

PULPIS

Polished - 60*120cm



Light Cream Pulpis




Dark Cream Pulpis



PORTORO

Polished - 60*120cm

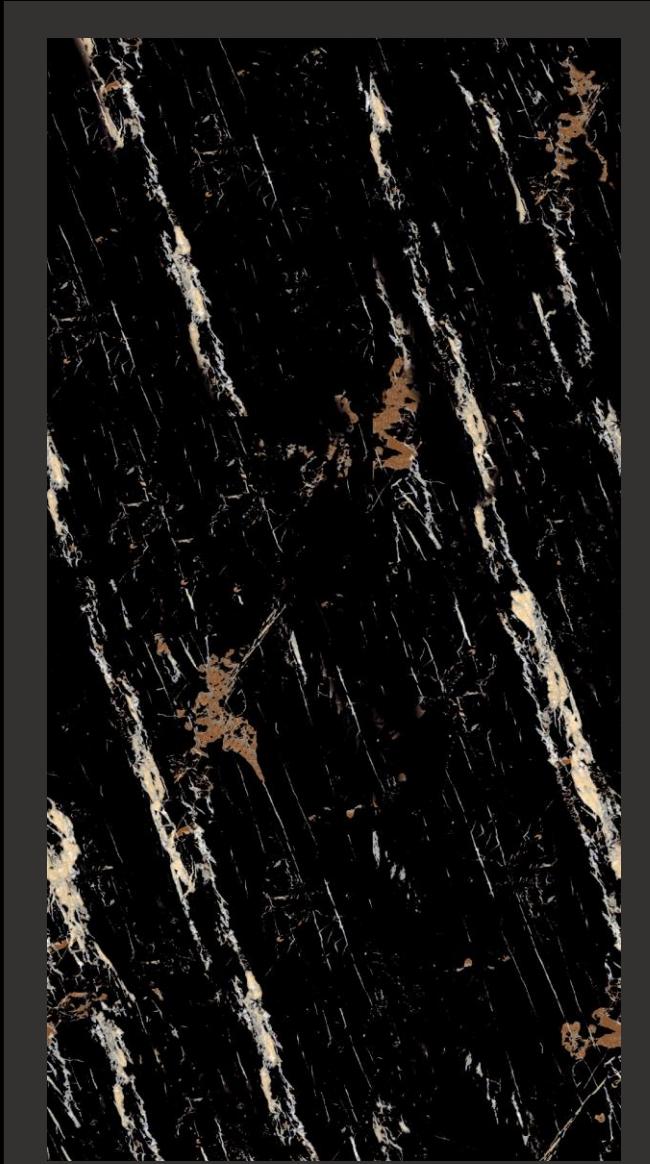

SUPER WHITE


Polished - 60*120cm



NOVIN CERAM




Polished - 60*120cm

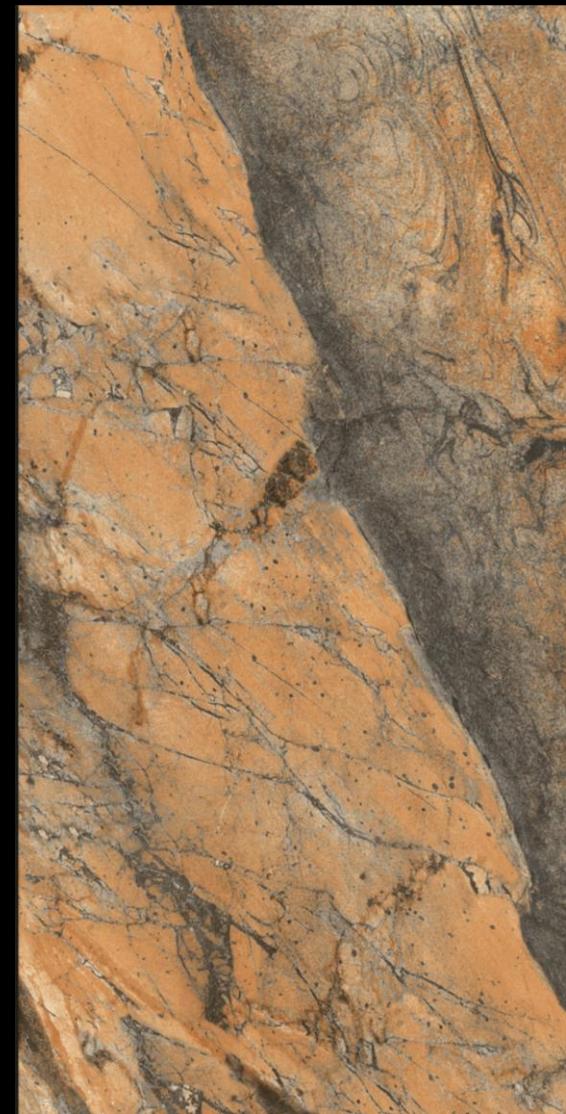

OLIVER

Polished - 60*120cm

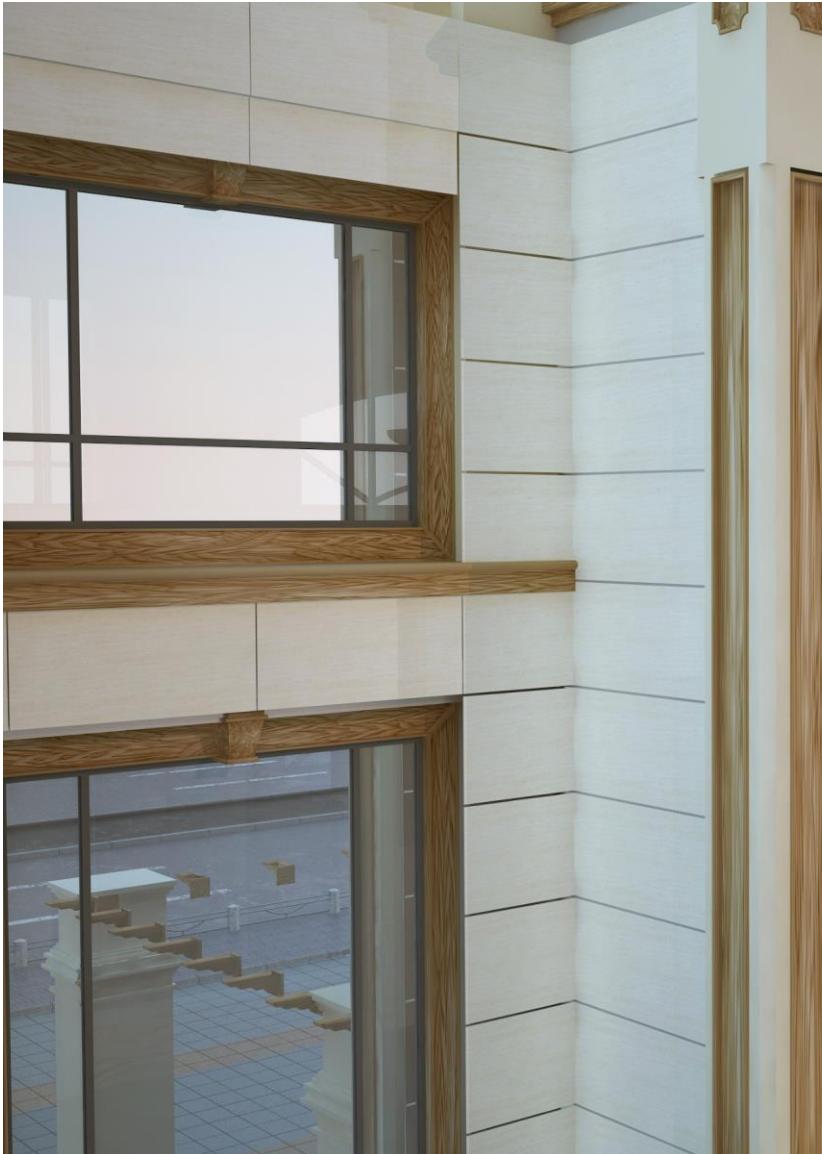

Cream Oliver



Gray Oliver



Polished - 60*120cm




Light Raymond



Dark Raymond



Polished - 60*120cm

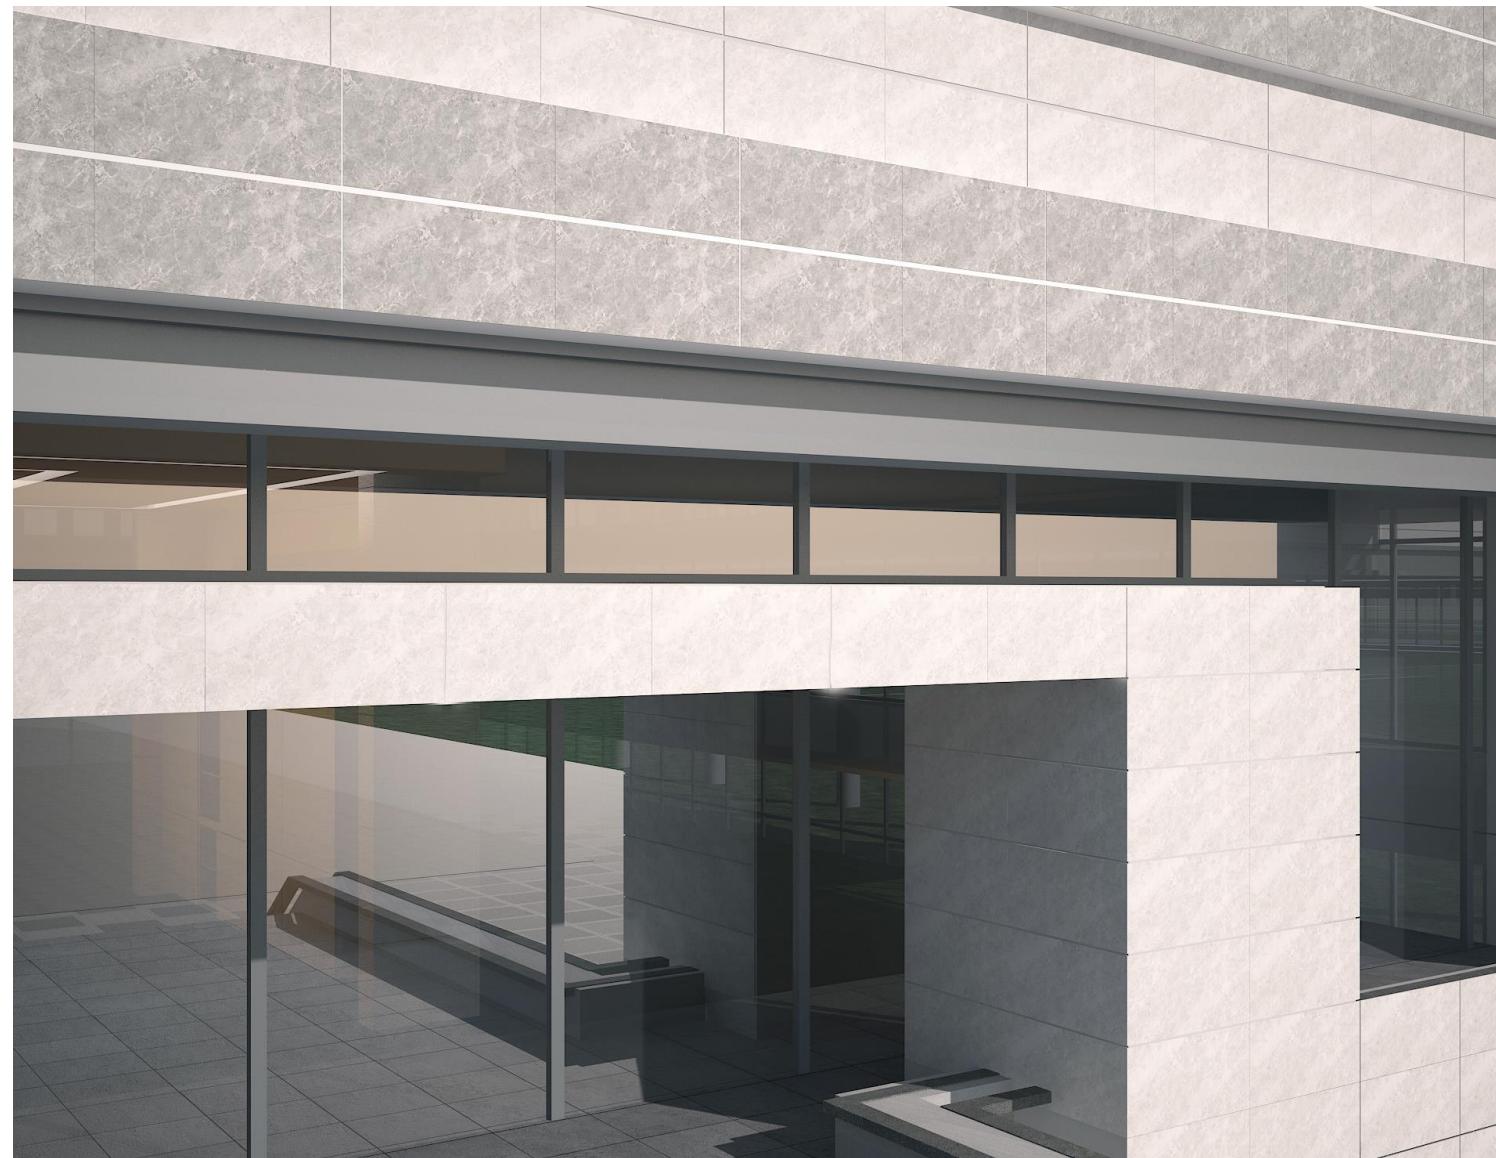

Light Palmira



Dark Palmira



Polished - 60*120cm



Light Leon



Dark Leon



STAR (GRAY)

Polished - 60*120cm



Light Gray Star





Dark Gray Star



LUCIANA (GRAY)

NOVIN CERAM

Polished - 60*120cm

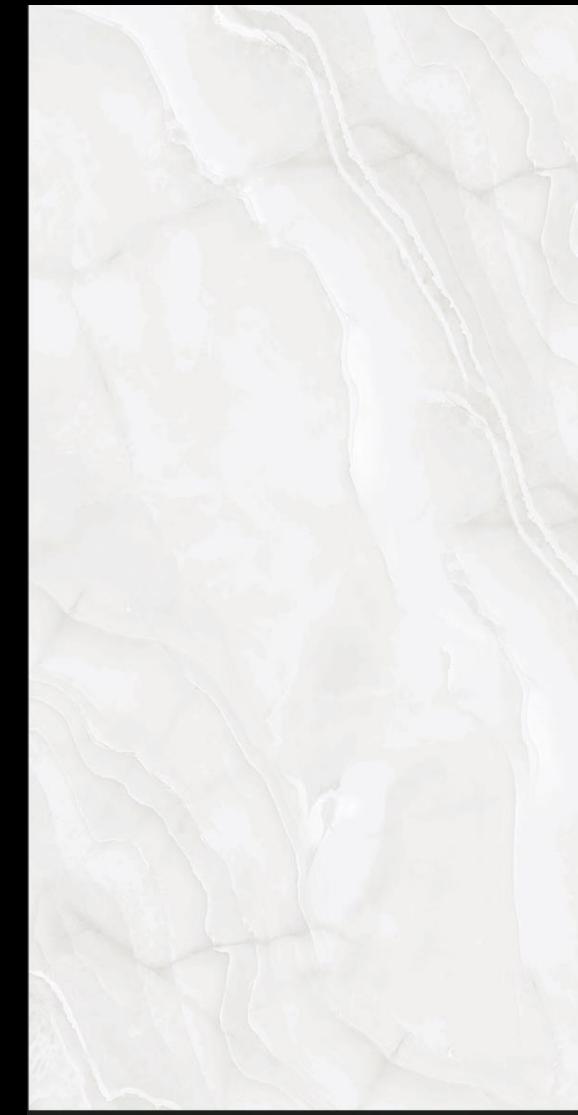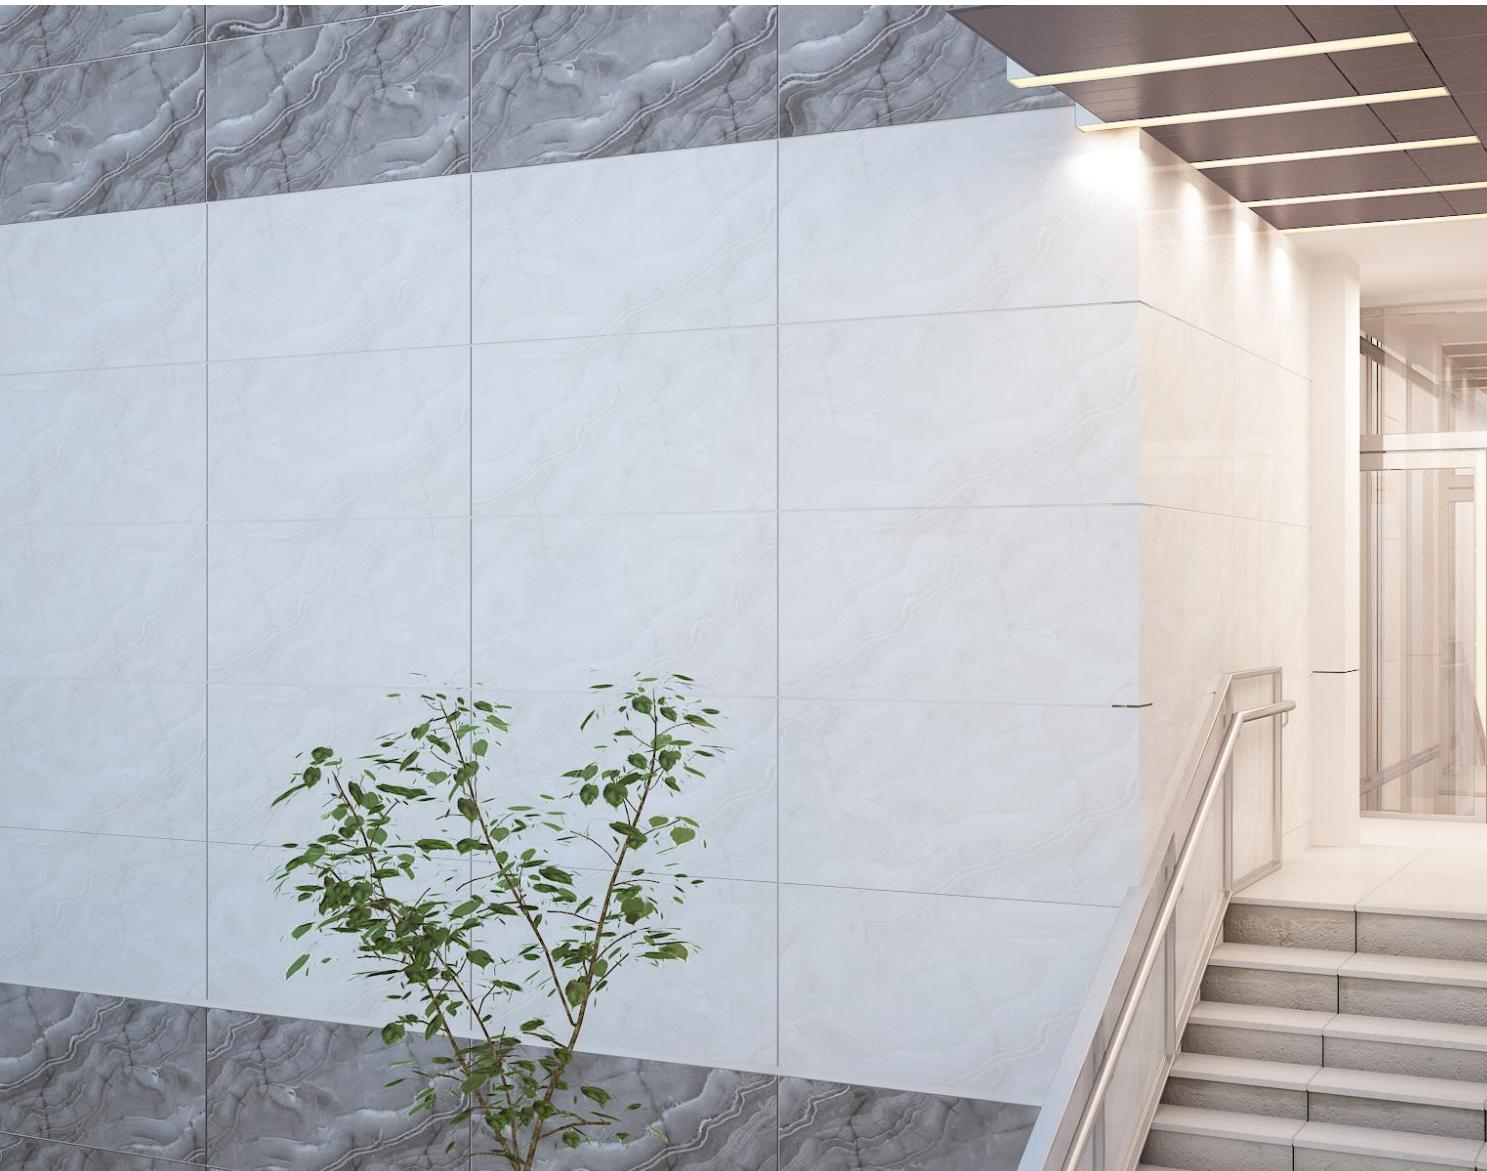

Light Gray Lusiana



Dark Gray Lusiana



Polished - 60*120cm



LIGHT SAVA



DARK SAVA

SAMANTA (GRAY)

NOVIN CERAM

Polished - 60*120cm



Light Gray Samanta



Dark Gray Samanta



Polished - 60*120cm




Light Jaccar



Dark Jaccar

SUPER BLACK

Polished - 60*120cm



VIVA

Polished - 60*120cm



NOVIN CERAM



PORCELAIN TILE

(Matte)

Km 4_ Sefid Kooh Area – Taft Police Station _ Yazd _ Iran

Tel : +9832632705 – 8



DESERT

Matte - 60*120cm




Light Desert



Dark Desert



Matte - 60*120cm

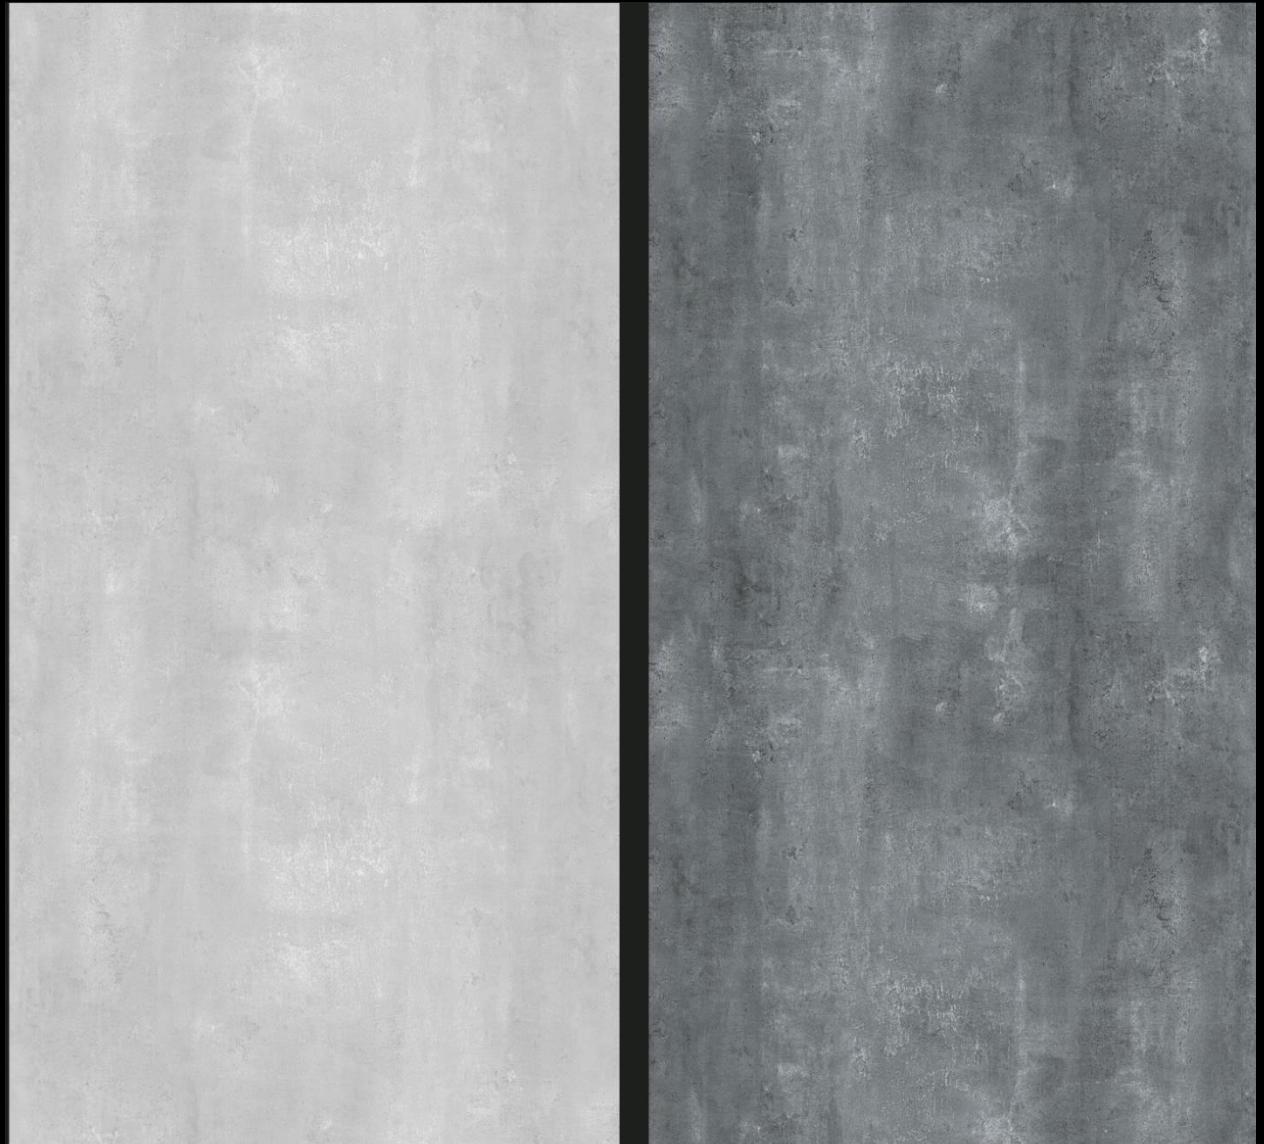

Light Samanta

Dark Samanta



PORCELAIN TILE

(Sugar Effect)

Km 4_Sefid Kooh Area – Taft Police Station _ Yazd _ Iran

Tel : +9832632705 – 8



SAMANTA (GRAY)

Suger Effect - 60*120cm



Light Gray Samanta



Dark Gray Samanta


SAMANTA (OLIVE)

Suger Effect - 60*120cm

NOVIN CERAM



Light Olive Samanta

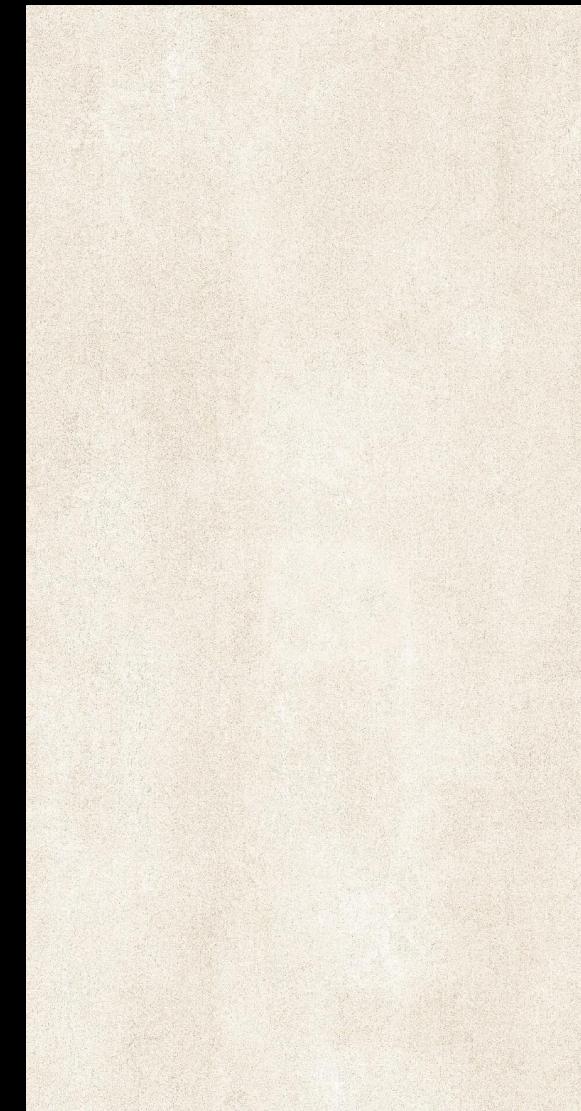

Dark Olive Samanta





Name and kind of product	Glazed Porcelain Tile	Manufacturer Company	Novin ceram co
Type of application	Floor	Standard	ISO 13006:2012/IQS:1704/5/1997
Place of application	Indoor & outdoor	Group	Bla
Address of manufacturer	4km,Sefidkooch area , taft police station.yazd iran		

N	Characteristic		Results	Test limit	Test Method	
					ISO 13006	IQS: 1704/5
1	smd nature of the surface (mm)	1-1	Length(mm)	±.03%	Reference guideline number 256 / 1 on dimensions and nature of the surface of ceramic Tiles used for floors and walls ± 0.03%	ISO 10545-2
			Width(mm)	±.03%		
			variation of the average size of each tile	±.02%		
		1-2	Side straightness	± 0.1%		
		1-3	Angularity	±0.2%		
		1-4	Surface	Tile center convexity		
			leveling(%)	Edge convexity	± 0.4%	
				Warpage	± 0.3%	
		1-5	Nature of the surface		Atleast 95% of the tiles shall be free of clear visible defect	
2	Physical properties	2-1	water absorption(%)	0.07%	E ≤ 0.5	ISO 10545-3
		2-2	Breakage strength (N)	2650	Not less 1300	ISO 10545-4
			Modulus of Rupture(N/mm ²)	47	Minimum 32	ISO 10545-4
		2-3	Resistance to Abrasion	300cycle ok	Minimum class 1	ISO 10545-6
		2-4	Linear Thermal Dilatation index with ambient temperature to 100	Non compulsory 9*10 ⁻⁶	9*10 ⁻⁶ per kelvin maximum	ISO 10545-8
		2-5	Resistance to thermal shock	–	test method available	ISO 10545-9
		2-6	Resistance of Glazed tiles to crazing	ok no crazing	No crazing	ISO 10545-11
		2-7	Detarmination of frost Resistance	ok	should be Acceptable	ISO 10545-12
3	Chemical properties	3-1	Resistance to staining Glazed Tiles	class4	Minimum class3	ISO 10545-13
		3-2	Resistance to Household chemicals and swimming pool salts	GB	Minimum class GB	Reference guideline number 256 3 on Determination of Resistance of unglazed tiles to chemicals
		3-3	Resistance to low concentration Acids and Alkalies	GLB	Minimum class GLB	
			Resistance to High concentration Acids and Alkalies	–	test method available	ISO 10545-13 ISO 10545-14
4	Pachaging & marking		Accepted			

The Result : Above ample in the teasted cases is matched with IQS : 1704/5

